

# WPW/R RECIPES SCALES



release date 15-09-2011





Formula scales are equipped with measuring indicator PUE C41H and weighing platform.

Formula system is connected with external automatic system, equipped with steering and performing devices. These devices enable automatic, semi-automatic and manual dosing of liquids and loose materials. Moreover the system enables preparation of mixtures from gathered components (dosing exits). Ingredients have assigned nominal masses, which are measured by the system during dosing process.

Formula system options:

- possibility to rescale masses of formula ingredients (multiplier of formula mass).
- Possibility to set particular ingredients tare mode during dosing or formula making time.
- Possibility to set the way of ingredient's mass acceptance after weighing (manual or automatic)
- Possibility to declare of cycle numbers for specific formula,
- Possibility to stop the formula or dosing process at each stage of advance
- Possibility to work with external buttons: TARA, ZERO, PRINT, START, STOP, (START/STOP) CHUTE and free configuration of inputs assigned to the button,
- Free configuration possibility of output numbers for the following functions; MIN, OK., MAX, STABIL, CHUTE P1, CHUTE P2, WORK,
- Printout from formula and dosing process
- Program is equipped with standard printout form for reports, which consists of following information: date and time of the report, operator's name, formula's name, formula's code, formula's mass, mode, formula's status, assortment's name, assortment's ID, assortment's mass, assortment's setting, assortment's deviation,
- Access to operator's, assortment's formula's, weighing's, universal variables, and tare database.

- Counting pieces
- Checkweighing
- Summing function
- Filling
- Animal weighing
- Percentage
- Statistics
- Caps lock of max indication
- Measurement in Newton

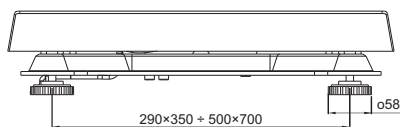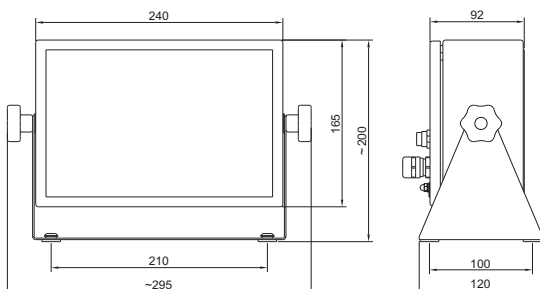

## Technical data:

	WPW/R 6 C1/K	WPW/R 15 C1/K	WPW/R 30 C1/K	WPW/R 30 C2/K	WPW/R 60 C2/K
Max capacity	6 kg	15 kg	30 kg	30 kg	60 kg
Readability	2 g	5 g	10 g	10 g	20 g
Tare range	-6 kg	-15 kg	-30 kg	-30 kg	-60 kg
Pan size	290x350 mm	290x350 mm	290x350 mm	400x500 mm	400x500 mm
Working temperature	-10° - +40 °C				
Output signal	RS 232, RS 485				
IP rating	IP 67				
Power supply	230V AC or 120V AC				
Display	LCD				

## Technical data:

	WPW/R 150 C2/K	WPW/R 300 C2/K	WPW/R 150 C3/K	WPW/R 300 C3/K
Max capacity	150 kg	300 kg	150 kg	300 kg
Readability	50 g	100 g	50 g	100 g
Tare range	-150 kg	-300 kg	-150 kg	-300 kg
Pan size	400x500 mm	400x500 mm	500x700 mm	500x700 mm
Working temperature	-10° - +40 °C			
Output signal	RS 232, RS 485			
IP rating	IP 67			
Power supply	230V AC or 120V AC			
Display	LCD			

**RADWAG**

26-600 Radom • 28 Bracka Street • POLAND • Phone: +48 48 3848800 • Fax: +48 48 3850010 • www.radwag.com • e-mail:export@radwag.com